

16277-93
(6305-2-83)

50, 65 75



2006

16277-93

1

27 2 1993 .

:

3 2 6305-2—83 «
() » 2.

4 16277-84, 16278-78, 16279-78

5 . 2005 .

© , 1994
© , 2006

50, 65 75

16277-93

(6305-2-83)

Plates of separate fastening for railway P50, P65 and P75 rails. Specifications

MKC 45.080
11 3000

1995—01—01

(—)

50, 65 75

2.

1

1.1

75

1


1.

50, 65

1.2

65 75

2.

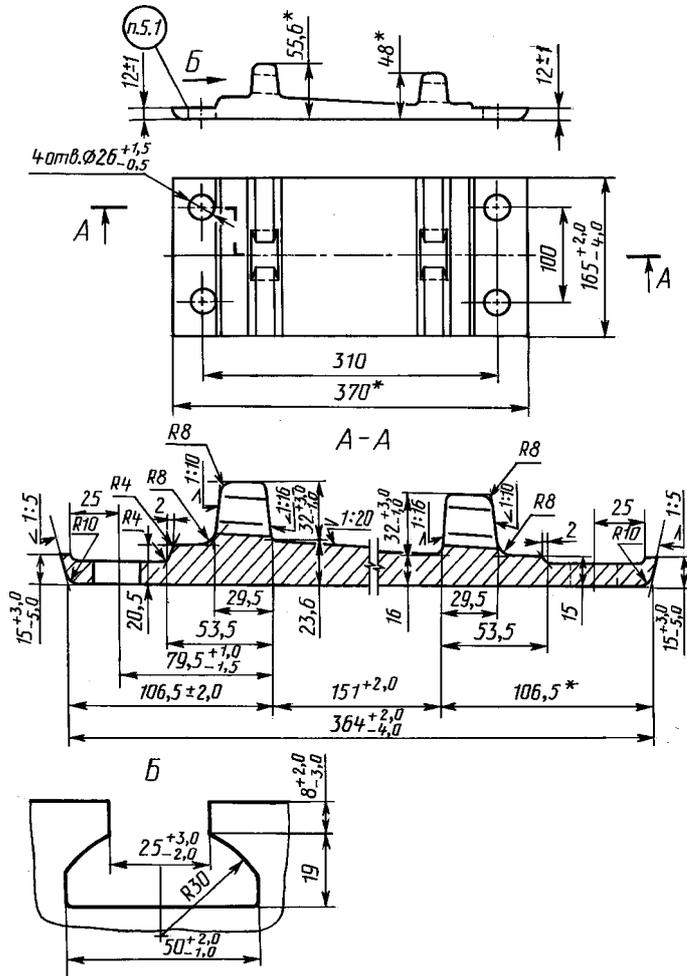

1.3

3.

2

026

;-	1-	U	8
----	----	---	---

3

65 75

16277-93

2 65 16277-93

65 16277-93

1 65 16277-93

1.4

1.5

1.6

1.7

2

2.1

2.2

4 380.

1/4 380

2.3

2.4

2.5

2

3 45°.

+1,0

1(4).

4 , 4

0,16 % (

0,28 %).

2.

	0,5	0,4
20	1,5	1,5
	1,5	1,2
	3,0	2,0
	5,0	3,0
	2,0	1,5
	3,0	—

2.6

2

2.7

3.

4

:	0,5	0,4
,	2,0	1,5
,	1,0	0,8
,	1,0	0,5
,	3,0	2,0
:	1,5	0,2
,	0,5	0,2
,	1,0	1,0
:	4,0	2,5
,	8,0	
,	1,5	
,	5,0	

2.8

2.9

1 ,

2.10 -

2.11 () 3 ,

2.12 , -

2.13 45° . 2.1—2.12 , -

2.14 -

:

— 0,05%;

— 0,015%;

) , 1 (1; -

(.2 3) ;

— 15° .2.12;

(. 2.8) — 25 ,

16277-93

2.15

—

20

2.16

2.14,

2.17

7566.

3

3.1

(1.1—2.11, 1 3);

2);

(2.3);

(2.12).

3.2

500—3000

5000

1000

3.3

1%

3%—

5

3.4

3.5

3

2

3.6

4

4.1

4.2

4.3

V-

5

(1.1—2.10, 1, 2)

(2.7)

(2.3)

9012.

10

135°.

(1)

4

	2	, ()	
		1	
1 50	70,07	55,0	7,0
2 50	69,70	54,7	6,85
1 50	70,07	55,0	8,4
2 50	69,70	54,7	8,3
1 65	70,07	55,0	7,0
2 65	69,70	54,7	6,85
1 65	70,07	55,0	8,4
2 65	69,70	54,7	8,3
65	79,57	62,5	9,7

7850 / 3.

3.6
3.6.1

33 3 33 1,5 20

3.6.2

()

3.7

6.

3.3,

6

		*	-
L	,	±4	/
/		±3	/
	—	±1	-
()	—	+1,5	/
		:±0,5	
		0,1 -	
		/	
		1,5	
		±7/1000	-
			()
*	(> 160 /)		-

3.8

0,5

16277-93

4

4.1

4.1.1

50

4.1.2

50

(/);

();

6,

.4.3.2.

4.2

4.2.1

78,5

50

—60—70

10

4.2.2

3000

10000.

« »

4.3

4.3.1

3.1.

1497.

4.3.2

4.1.2,

17769.

5%

5%

()

5%

15%

« » « »



)

4.3.3

5

.1

L /




.2


()

()


$$\frac{8 - \wedge}{4}$$



.4




.5

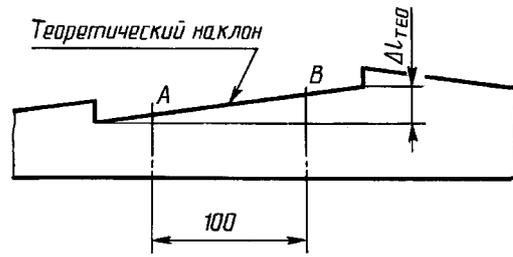

() , ± 0,007, / ±0,7 Aw , -

()

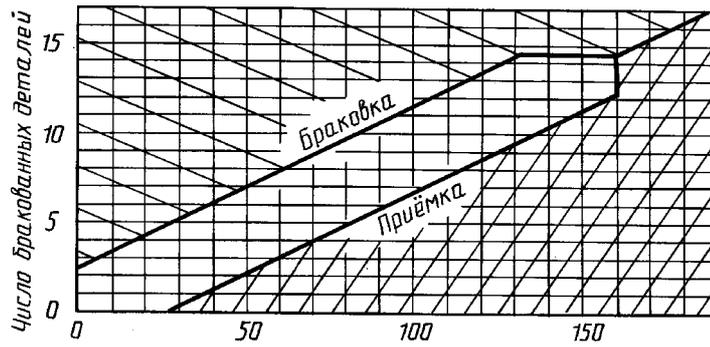

(). X.


: « » « ».

« »

- 1)
- 10;
- 2)

X

(. ')

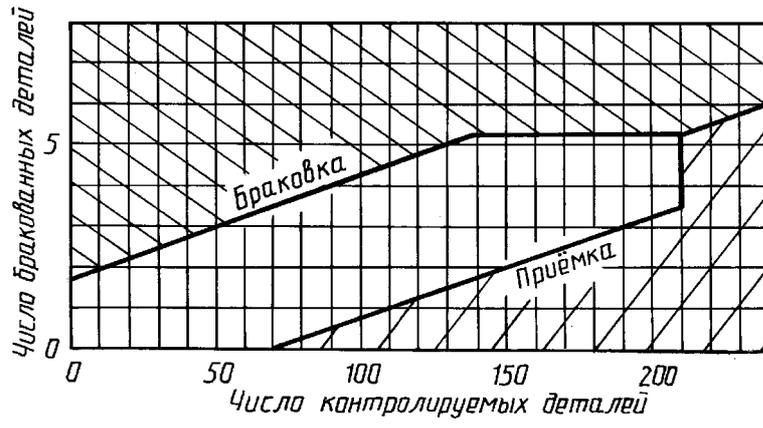

380-94	2.2	
1497-84		2
7566-94	2.17	
9012-59	4.2	
17769-83		2

31.10.2005. 22.12.2005. 60 84 1/8
. . . 1,86. - . . 1,35. 54 . . 972. 2269.